



SPEED QUEEN® MULTI-HOUSING LAUNDRY SOLUTIONS  
Front Control Single Dryer


## Quantum® Gold

Prep for Card | Coin Drop Installed

### Built for Reliable Performance

Speed Queen's dryer, defined by its simplicity and its performance, provides everything you need to get the job done - and nothing you don't. Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Speed Queen's dryers provide the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. Front load products have met every design standard to be 100% ADA compliant.

- Integrated meter case
- Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26.875" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder
- Large capacity meter case standard

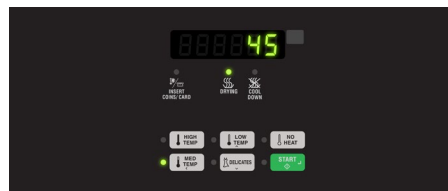


### Quantum™ Gold Control

The cutting edge Quantum™ control system from Speed Queen® gives you the freedom to manage laundry your way with the power to achieve unmatched levels of revenue. Quantum™ Gold provides users with additional cycle choices while offering new options to help lower operating costs and incorporates tools and options to increase revenue.

# Front Control Single Dryer

## Quantum™ Gold

Specifications			
Control Option	Quantum Gold		
Color	White		
Capacity - lb (kg)	18 (8.2)		
Cylinder Volume - cu. ft. (liters)	7.0 (198)		
Motor (Thermal Protected)	0.33 HP		
Type Of Gas (Gas Models Only)	Factory Equipped Natural		
Air Outlet Diameter - in (mm)	4 (102)		
Exhaust Airflow - cfm (liters/sec)	220 (105)		
Available Cycles	High, Medium, Low, Delicates, No Heat		
Electrical Requirements	Electric	120/240/60/1-30 amp 120/208/60/1-30 amp	
	Gas	120/60/1-15 amp	
Heating Element	Electric	5350W, 240V 4750W, 208V	
	Gas	25,000 Btu	
Net Weight - lb (kg)	Electric	150 (68)	
	Gas	150 (68)	
Shipping Weight - lb (kg)	Electric	161 (73)	
	Gas	161 (73)	
Shipping Dimensions Approx. - in (mm)	Width	30.5 (775)	
	Depth	29.5 (762)	
	Height	45 (1143)	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	

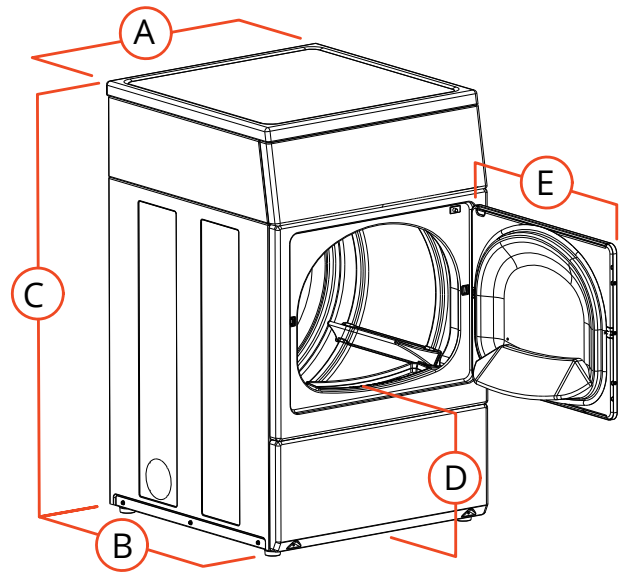

A. Overall Width - in (mm)	26.875 (683)
B. Overall Depth - in (mm)	28 (711)
C. Overall Height - in (mm)	44.34 (1126)
D. Floor To Door Opening - in (mm)	15.44 (392)
E. Door Swing - in (mm)	23.5 (597)

Models	Voltage/Freq/PH	Activation
SDENCAGS173TW01	120/240/60/1	Electric
SDEWCAGS173TW41*		
SDGNCAGS113TW01	120/60/1	Gas
SDGWCAGS113TW41*		
SDENYAGS173TW01	120/240/60/1	Electric
SDEWYAGS173TW41*		
SDENYAGS153TW01		
SDEWYAGS153TW41*		
SDGNYAGS113TW01	120/60/1	Gas
SDGWYAGS113TW41*		

\* Wireless Network Board Factory Installed

Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.